


EASYultra

Installation manual

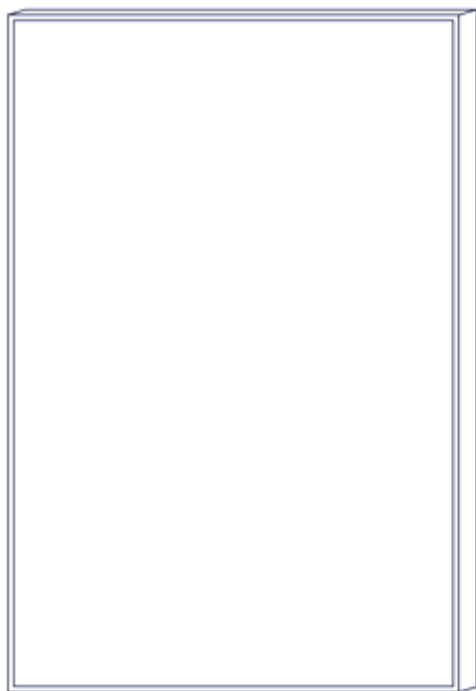

General

EASYultra wall panels consist of an aluminium frame, containing glass wool and the visible side is finished with a soft impact-resistant fibreglass top foil.

The application of the wall panels is to absorb sound reflections to reduce reverberation in interior spaces and thus improve the acoustics. You hang the wall panels on a supplied french cleat.

For more information about this product, please visit our website or contact us by phone.

Points of attention

- Watch out for sharp objects when unpacking and assembling ;
- Provide a clean work area to avoid stains on the wall panel during installation.




Need help?

Contact us!

+31 30 227 08 00



info@easy-noisecontrol.nl

Necessities

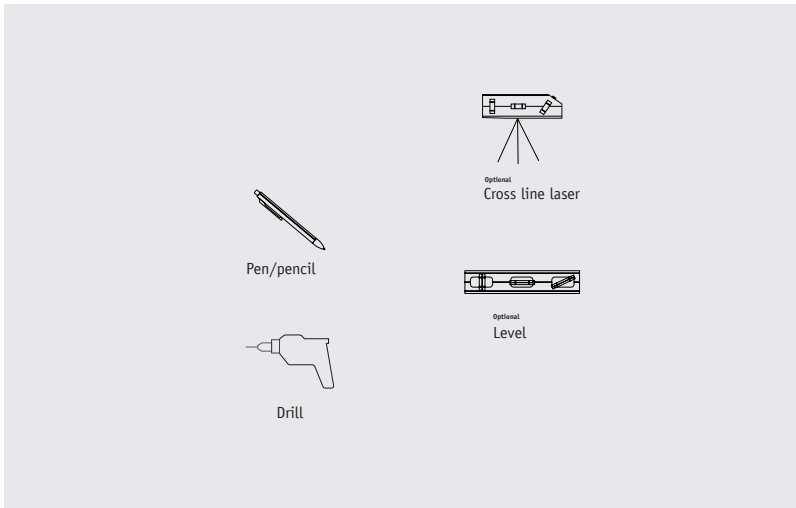



Components

French cleat	1x
Wall panel	1x



01 Fix the french cleat to the wall


Place the french cleat against the wall and mark it. Drill holes in the wall and place the plugs in them. Then screw the french cleat onto the wall.

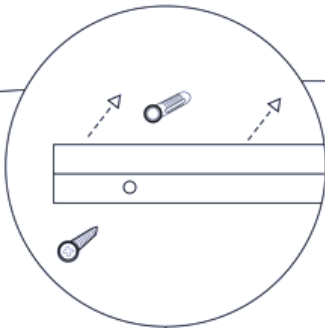

Tip: Use a cross-line laser or level to align the wall panel. Fix the french cleat to the wall.

02 Place the wall panel

Hang the wall panel on the french cleat. The panel will hang directly against the wall.

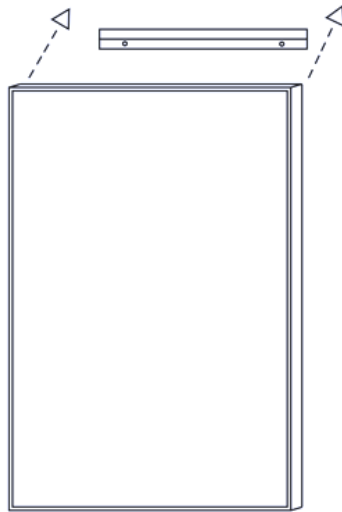

#weareacoustics

This text has been compiled with the utmost care. The same applies to the test results and further certificates.

However, no rights may be derived from this text and modifications are subject to change. It is not possible to guarantee certain properties or the suitability of our products for a specific application. Please refer to our additional conditions or contact us.